

GroE

Vented lead-acid battery



Motive Power Systems

Reserve Power Systems

Special Power Systems

Service

Your benefits with HOPPECKE GroE

- **Excellent high-current capability** - low investment costs due to specially designed Planté plate
- **Highest expected service life** - due to pure lead electrodes and minimum electrolyte density
- **Maximum compatibility** - design according to DIN 40738
- **Higher short-circuit safety even during the installation** - based on HOPPECKE system connectors
- **Extremely extended water refill intervals up to maintenance-free** - optional use of AquaGen® recombination system minimizes emission of gas and aerosols¹

Typical applications of HOPPECKE GroE

- Power Plants
- Substations
- Uninterruptible power supply (UPS)



Similar to the illustration, AquaGen® optional

Type overview


Capacities, dimensions and weights

Type	C _{nom} /1.80 V Ah	C ₁₀ /1.80 V Ah	C _{1/2} /1.75 V Ah	C _{1/4} /1.70 V Ah	C _{1/6} /1.60 V Ah	max.* Weight kg	Weight electrolyte kg (1.22 kg/l)	max.* Length L mm	max.* Width W mm	max.* Height H mm	Fig.
3 GroE 75	75	78	39.5	30.5	26.0	17.5	6.7	184	155	410	A
4 GroE 100	100	104	53.0	40.5	34.5	19.7	6.5	184	155	410	A
5 GroE 125	125	130	66.0	50.8	43.5	21.9	6.3	184	155	410	A
6 GroE 150	150	156	79.5	61.0	52.0	24.1	6.1	184	155	410	A
7 GroE 175	175	182	92.5	71.0	60.5	26.3	5.9	184	155	410	A
8 GroE 200	200	208	106	81.3	69.5	33.2	9.7	184	230	410	A
9 GroE 225	225	234	119	91.3	78.0	35.4	9.5	184	230	410	A
10 GroE 250	250	260	133	102	86.5	37.6	9.3	184	230	410	A
11 GroE 275	275	286	146	112	95.5	39.8	9.1	184	230	410	A
12 GroE 300	300	312	159	122	104	42.0	8.9	184	230	410	A
13 GroE 325	325	338	172	132	113	52.5	14.3	184	340	410	B
14 GroE 350	350	364	186	142	121	54.7	14.1	184	340	410	B
15 GroE 375	375	390	199	152	130	56.9	13.9	184	340	410	B
16 GroE 400	400	416	212	163	139	59.1	13.7	184	340	410	B
17 GroE 425	425	442	225	173	147	61.3	13.5	184	340	410	B
18 GroE 450	450	468	239	183	156	63.5	13.3	184	340	410	B
5 GroE 500	500	550	228	168	138	95.0	36.0	330	270	590	A
6 GroE 600	600	660	273	201	165	104	35.1	330	270	590	A
7 GroE 700	700	770	319	235	192	113	34.2	330	270	590	B
8 GroE 800	800	880	364	268	220	122	33.3	330	270	590	B
9 GroE 900	900	990	410	302	248	131	32.4	330	270	590	B
10 GroE 1000	1000	1100	455	335	275	140	31.5	330	270	590	B
11 GroE 1100	1100	1210	501	369	302	149	30.6	330	270	590	B
12 GroE 1200	1200	1320	546	402	330	170	41.4	330	350	590	C
13 GroE 1300	1300	1430	592	436	358	179	40.5	330	350	590	C
14 GroE 1400	1400	1540	637	469	385	188	39.6	330	350	590	C
15 GroE 1500	1500	1650	683	503	412	197	38.7	330	350	590	C
16 GroE 1600	1600	1760	728	536	440	222	52.0	330	440	590	C
17 GroE 1700	1700	1870	774	570	468	231	51.1	330	440	590	C
18 GroE 1800	1800	1980	819	603	495	240	50.2	330	440	590	C
19 GroE 1900	1900	2090	865	637	522	249	49.3	330	440	590	C
20 GroE 2000	2000	2200	910	670	550	258	48.4	330	440	590	C
21 GroE 2100	2100	2310	956	704	578	285	63.2	330	530	590	D
22 GroE 2200	2200	2420	1001	737	605	294	62.3	330	530	590	D
23 GroE 2300	2300	2530	1047	771	632	303	61.4	330	530	590	D
24 GroE 2400	2400	2640	1092	804	660	312	60.5	330	530	590	D
25 GroE 2500	2500	2750	1138	838	688	325	66.0	330	575	590	D
26 GroE 2600	2600	2860	1183	871	715	334	65.1	330	575	590	D

C_{nom} = nominal capacity at 10 h discharge according to DIN 40738

C₁₀, C_{1/2}, C_{1/4} and C_{1/6} = Capacity at 10 h, 1/2 h, 1/4 h and 1/6 h discharge

* according to DIN 40738 datas to be understood as maximum values

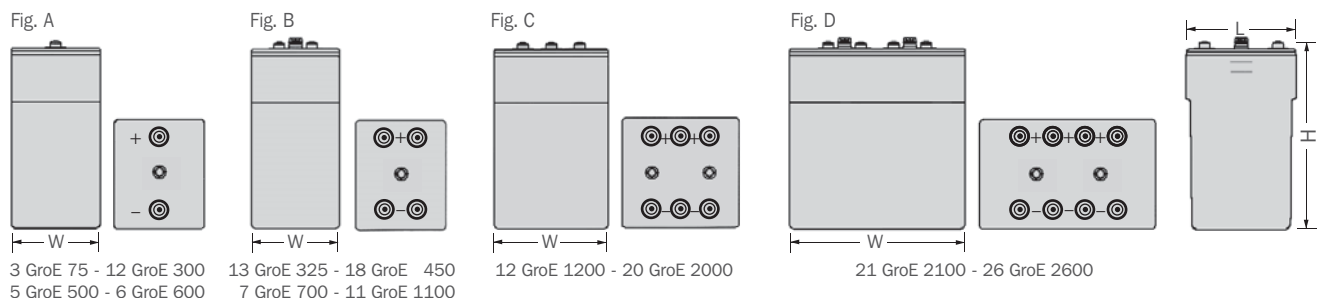

Design life: up to 25 years

Optimal environmental compatibility - closed loop for recovery of materials in an accredited recycling system.

¹ Similar to sealed lead-acid batteries